

NO. A/18404/01/DMS/2016-17
Govt. of India
Delhi Milk Scheme
West Patel Nagar
New Delhi-110012

Dated 17.09.2016

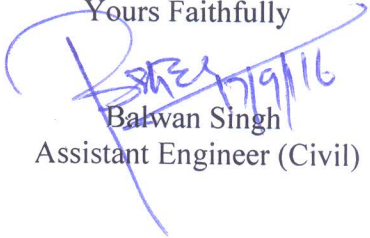
To

Administrative Officer
NIC, Room NO. 436
Krishi Bhawan New Delhi

Sir,

You are requested to publish the enclosed Notice Inviting Tender on DMS Web Site i.e. www.dms.gov.in at the earliest.

Yours Faithfully


Balwan Singh
Assistant Engineer (Civil)

Copy to:-

- ✓ 1. In charge EDP please ensure putting above said tender notice on DMS web site

NO. A/18404/01/DMS/2016-17
Govt. of India
Delhi Milk Scheme
West Patel Nager New Delhi 110008

Sealed percentage rate quotations are invited for the work mentioned below and same shall be received from working/ willing contractors up to 2.30 P.M. and same shall be opened at 3.00 P.M. on 30.09.2016 in the office of Assistant Engineer (Civil) in the presence of indenting contractors. Quotationers should satisfy themselves with the scope of work before quoting their rates. Quotationers are requested to put the same in the tender box kept in the reception hall.

Subject: - Replacement of damaged storm water drains connecting central dairy road to shadipur colony road near time office DMS during 2016-17

SCHEDULE OF WORKS/ITEMS

S.NO.	Description of items	qty.	unit	rate	amount
1.	Dismantling manually /by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 m lead as per direction of engineer in charge.	9.0	sqm	159.05	1431/-
2.	Excavating trenches of required width for pipes ,cablesetc including excavating for sockets and dressing of sides ,ramming of bottoms depth up to 1.5 m including getting out the excavating soil and then returning the soil as required in layers not exceeding 20 cm in depth including consolidating each deposited layer by ramming watering etc. and disposing of surface excavatedsoil as directed within a lead of 50 m ,pipes, cables etc exceeding 80 mm dia but not exceeding 300mm dia	15.0	metre	208.30	3124/-
3.	Providing and laying non pressure NP2 class (light duty) RCC pipes with collars jointed with stiff mixture of cement mortar in the proporation of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete 250 mm dia RCC pipe	15.0	metre	468.60	7029/
4.	Making connection of drain or sewer line with existing manhole including breaking in to and making good the wall ,floors with cement concrete 1:2:4 (1 cement : coarse sand : 4 stone aggregate 20mm nominal size) cement plastered on both side with cement mortar 1:3(1 cement : 3coarse sand) finished with a				

floating coat of neat cement and making necessary channels for the drain etc. complete for 100 mm to 250 mm diameter

4nos each 364.60 1458/-

5. Providing and laying cement concrete 1:5:10 (1 cement :5 coarse sand : 10 stone aggregate 40 mm nominal size) up to haunches of pipe including bed concrete as per standard design 250 mm diameter

15.0 metre 624.60 9369/-

6. Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering all work up to plinth level in 1:2:4 (1cement : 2 coarse sand : stone aggregate 20 mm nominal size)

2.0 cum 5466.30 10933/-

Estimated cost based on DSR -2014 = Rs. 33,344/-

CONDITIONS :- AS ENCLOSED

